



Tekniske spesifikasjoner




BREDDDE	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-
Skuff inni	257	357	457	557	Flere skuffekombinasjoner										
Ekstern enhet	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415			

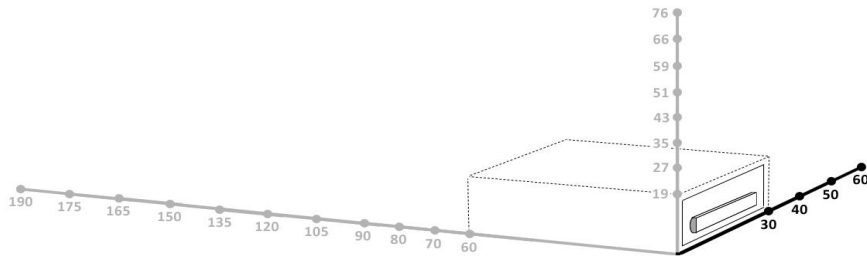

HØYDE	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Skuff inni	117	196	275	354	432	511	590	669	Flere skuffekombinasjoner						
Skuffhøyde på skuffen	86	86	188	188	330	330	330	330							
Skillehøyde	76	76	178	178	320	320	320	320							
Ekstern enhet	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

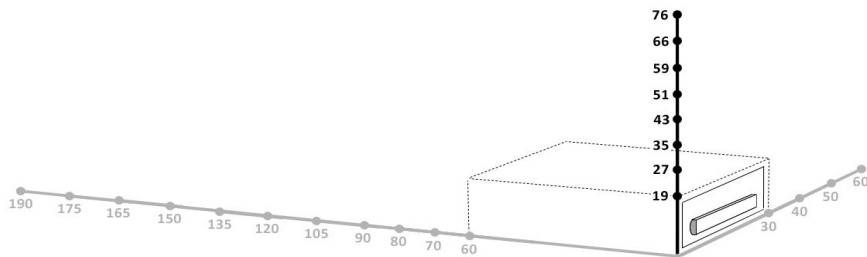


DYBDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Skuff inni	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Skuffens åpne prosent (%)	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standard skillevegg	-	-	-	-	1 skillevegg monteres under produksjonen										
Maks. lastekapasitet per skuff	60 KG				100 KG										
Ekstern enhet	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

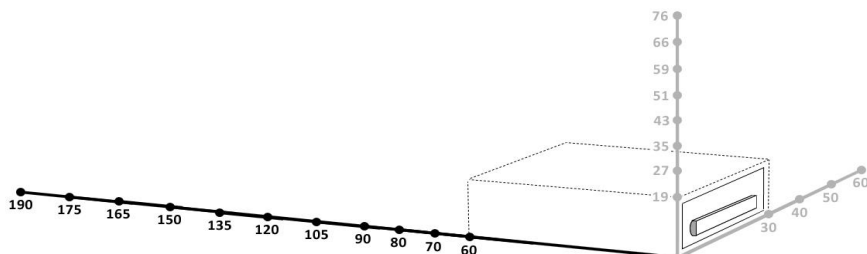




BREDDDE	30	40	50	60	-	-	-	-	-	-	-	-	-
Åpent rom inne	275	374	473	572									
Ekstern enhet	315	415	515	615									

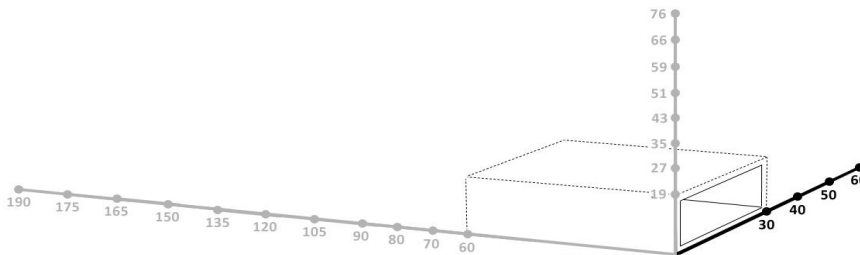

HØYDE	19	27	35	43	51	59	66	76	-	-	-	-	-
Åpent rom inne	161	240	318	397	476	555	633	731					
Ekstern enhet	191	270	348	427	506	585	663	761					

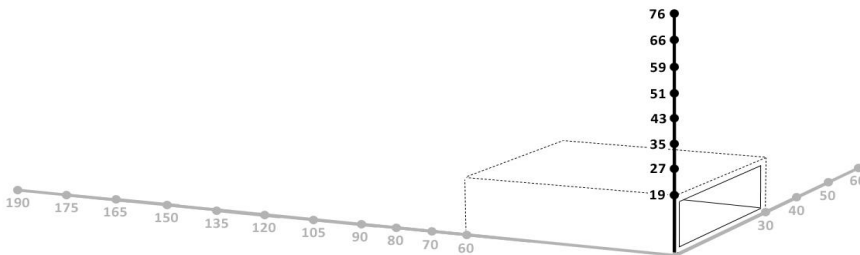

DYBDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-
Åpent rom inne	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855			
Ekstern enhet	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871			

